




FILTER PRESSURE VALUE TEST



CT FILTER PRESSURE VALUE TEST

- The filter pressure test system consists of a 28 mm single-screw extruder, a gear pump, pressure sensors, a screen changer, and CT Filter Pressure Test Program.
- The filter pressure value test according to EN 13900 – 5
- Low cost
- Smooth running
- Easy for maintenance
- Long service life

SOFTWARE

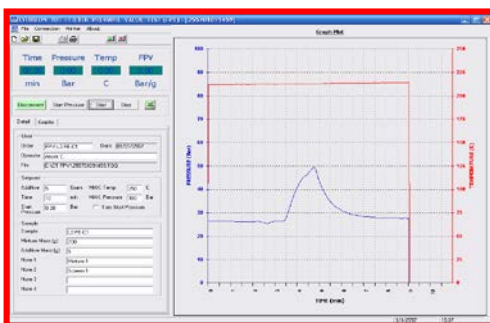

The CT Filter Pressure Test Program is a software to evaluate pressure real-time at the entrance of the screen filter and determine the filter pressure value (FPV). The measured data can be printed out and exported to MS Excel file.

Model	SE-D28L25	GP-D40L20
Equipment Type	Single – Screw Extruder	Gear Pump
Screw / Gear Diameter (mm)	28	40
Screw / Gear Length (mm)	700	20
Max. Barrel Temp. (°C)	280	300
Screw / Gear Speed (rpm)	0 - 140	0 – 24
Heating Zones	3	1
Main Motor (kW)	3.7	1.5
Power Supply	3 phase / 380 V	3 phase / 380 V

Contact us for more information about CT products and services. We are keen on working with you:

CHAREON TUT CO., LTD.

189 Moo 1 Theparak Road, Bangsaothong,
Samutprakarn, 10540 THAILAND.

Tel: 0 2315 4155-8 • Fax: 0 2315 4159

WWW.CHAREONTUT.COM